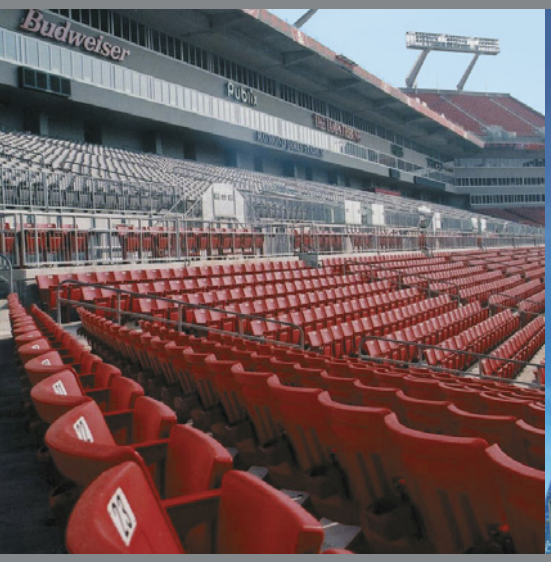

series 38

super durable powder coatings

TIGER Drylac® Powder Coatings

TIGER Worldwide Network

EUROPE

AUSTRIA
TIGER Coatings GmbH & Co. KG
A-4600 Wels
phone +43 / (0)7242 / 400-0
fax +43 / (0)7242 / 650 08
office@tiger-coatings.com
www.tiger-coatings.com

BELGIUM
Mr. Eric Kun
B-3680 Maaseik
phone +32 / (0)497 / 41 57 97
fax +32 / (0)89 / 56 78 58
office.be@tiger-coatings.com

C&E Warehousing
B-3640 Kinrooi
phone +32 / (0)497 / 92 25 70
fax +32 / (0)89 / 56 78 58

BOSNIA & HERZEGOVINA
Klio d.o.o.
BiH-75300 Lukavac
phone +387 / 35 / 555 392
fax +387 / 35 / 553 256
office.bih@klio.hr

Klio 1
BiH-71210 Ilidža, Sarajevo
phone +387 / 33 / 626 621

BULGARIA
Deyacolor LTD
BG-1113 Sofia 13 post box no. 265
phone/fax +359 / 2 978 58 61
office@deyacolor.com

CROATIA
Klio d.o.o.
CRO-10360 Zagreb Sesvete
phone +385 / (0)1 / 200 90 41
fax +385 / (0)1 / 200 90 43
klio@klio.hr

CZECH REPUBLIC
TIGERLAK, s.r.o.
CZ-620 00 Brno
phone +420 / 545 429 110
fax +420 / 545 229 209
office.cz@tiger-coatings.com

DENMARK
Ms. Brigitte Pudor Gullev
DK-6200 Aabenraa
phone +45 / 73 62 13 23
mobil +45 / 21 20 45 20
fax +45 / 73 62 13 24
office.dk@tiger-coatings.com

FRANCE
TIGER S.A.R.L.
F-69480 Anse
phone +33 / (0)474 / 67 13 70
fax +33 / (0)474 / 67 10 42
office.fr@tiger-coatings.com

GERMANY
KLOZ Kunststofftechnik GmbH
D-70736 Fellbach-Oeffingen
phone +49 / (0)711 / 95 19 80 32
fax +49 / (0)711 / 518 07 50
info@kloz-kunststofftechnik.de

KLOZ Wickede
D-58739 Wickede-Ruhr
phone +49 / (0)2377 / 36 25
fax +49 / (0)2377 / 26 22

Jochen Hänel Handelsvertretung
D-65239 Hochheim a. M.-Süd
phone +49 / (0)6146 / 83 58 81
fax +49 / (0)6146 / 83 58 84
jhaenel@gmx.de

Boris Herrmann Handelsvertretung
D-44309 Dortmund
phone +49 / (0)231 / 25 70 12
fax +49 / (0)231 / 25 70 15
b.herrmann@tiger-coatings.com

Thomas Leitzke Handelsvertretung
D-47647 Kerken
phone +49 / (0)2833 / 57 39 32
fax +49 / (0)2833 / 57 39 33
t.leitzke@tiger-coatings.com

GREAT BRITAIN
TIGER COATINGS UK LTD
Solihull, West Midlands, B93 9EG
phone +44 / (0) 1564 778 866
fax +44 / (0) 1564 778 903
office.gb@tiger-coatings.com

HUNGARY
TIGERLAKK Kft.
H-1183 Budapest
phone +36 / 1 / 293 90 20
fax +36 / 1 / 297 45 49
office.hu@tiger-coatings.com

ITALY
TIGER Drylac Italia s.r.l.
I-24121 Bergamo
phone +39 / 035 / 417 39 67
fax +39 / 035 / 22 37 11
office.it@tiger-coatings.com

LITHUANIA, LATVIA
UAB „LAKMALIT“
LT-3000 Kaunas
phone +370 / 7 / 32 37 41, 32 34 95
fax +370 / 7 / 32 40 87
kaunas@lakmalit.lt

THE NETHERLANDS
Mr. Ben de Jong
NL-2133 GJ Hoofddorp
phone +31 / (0)6 / 419 956 80
fax +31 / (0)23 / 565 58 72
office.nl@tiger-coatings.com

POLAND
Tensor Consulting
PL-04512 Warszaw
phone +48 / (0)22 / 815 42 79
fax +48 / (0)22 / 815 42 79
ajelonek@tensor.com.pl

ROMANIA
SC TIGER Coatings Romania SRL
R-010631 Bucuresti
phone +40 / (0)21 / 314 77 37
fax +40 / (0)21 / 314 77 87
office.ro@tiger-coatings.com

RUSSIA
OOO TECHNOKOLOR-M
107370 Moscow, Russia
phone +007 / 495 / 966 75 08
fax +007 / 495 / 963 47 45
sales@technocolor.ru

SERBIA
Klio NS d.o.o.
SCG-21000 Novi Sad
phone +381 / 21 / 478 01 08
fax +381 / 21 / 641 00 40
office@klio.co.yu

SLOVAKIA
TIGERLAK Slovakia spol.s r.o.
SK-902 01 Pezinok
phone +421 / (0)33 / 640 00 71
fax +421 / (0)33 / 640 00 72
office.sk@tiger-coatings.com

SLOVENIA
T-Lotus d.o.o.
SLO-9240 Ljutomer
phone +386 / (0)2 / 583 18 79
fax +386 / (0)2 / 583 18 80
kontakt@t-lotus.si

SPAIN
TIGER Coatings GmbH & Co. KG
12001 Castellón - SPAIN
phone +34 / (0)664 / 328 449
fax +34 / (0)964 / 050 309
office.es@tiger-coatings.com

SWITZERLAND
FEYCO AG
CH-9430 St. Margrethen SG
phone +41 / (0)71 / 747 84 11
fax +41 / (0)71 / 747 85 10
info@feyco.ch

TURKEY
Enki Iç ve Dis Tic. Paz. Dan. San. Tic. Ltd.Sti.
No: 26 Dk: 1Kadıköy-Istanbul
phone +90 / (0)216 / 467 38 57
fax +90 / (0)216 / 467 39 13
b.gurkan@tiger-coatings.com

UKRAINE
Interfarb - Ukraina
UA-79012 Lvov
phone/fax +380 / 322 / 40 23 11
phone/fax +380 / 322 / 97 10 76
interfarb@utel.net.ua

THE AMERICAS

ARGENTINA
Glass + Partner S.A.
AR-1429 Buenos Aires
phone +54 / 114 / 541 70 58
fax +54 / 114 / 541 70 58
glasspartner@arnet.com.ar

BRAZIL
TIGER Drylac do Brasil Ltda.
13295-000 ITUPEVA SP
phone +55 / 11 / 44 96 53 27
fax +55 / 11 / 44 96 65 14
office.br@tiger-coatings.com

CANADA
ONTARIO: TIGER Drylac Canada Inc.
Guelph, Ontario, N1G 4P5
phone +1 / 519 / 766 47 81
fax +1 / 519 / 766 47 87
info@tigerdrylaccanada.com

QUEBEC: TIGER Drylac Canada Inc.
Anjou, Quebec H1E 1P2
phone +1 / 514 / 351 53 31
fax +1 / 514 / 351 40 15
tigerqc@microtec.net

CALGARY: TIGER Drylac Canada Inc.
Calgary, Alberta Canada T2E 6L7
phone +1 / 403 / 398 97 23
fax +1 / 403 / 398 97 25
info@tigercalgary.bidcon.net

VANCOUVER: TIGER Drylac Canada Inc.
Delta, BC V3M 5P8
phone +1 / 604 / 540 97 26
fax +1 / 604 / 540 97 25
vancouver@tigerdrylaccanada.com

CHILE
TIGER Drylac de Chile Ltda.
San Ramon, Santiago de Chile
phone +56 / 2 / 511 56 59
fax +56 / 2 / 511 56 59
office.cl@tiger-coatings.com

MEXICO
TIGER Drylac MEXICO S.A. DE C.V.
Col. Santa Cruz Acatlan, Naucalpan
Edo. de Mexico C.P. 53150
phone +52 / 555 / 363 12 14
fax +52 / 555 / 363 17 39
mexico@tigerdrylac.com

U.S.A.
TIGER Drylac U.S.A., Inc. (HQ´s)
Ontario, CA 91761
phone +1 / 909 / 930 91 00
fax +1 / 909 / 930 91 11
customerservicewest@tigerdrylac.com

TIGER Drylac U.S.A., Inc.
St. Charles, IL 60174
phone +1 / 630 / 513 99 99
fax +1 / 630 / 513 99 98
customerservicemw@tigerdrylac.com

TIGER Drylac U.S.A., Inc. (HQ´s)
Reading, PA 19605
phone +1 / 610 / 926 81 48
fax +1 / 610 / 926 81 49
customerserviceeast@tigerdrylac.com

TIGER Drylac U.S.A., Inc.
Kennesaw, GA 30144
phone +1 / 770 / 218 24 90
fax +1 / 770 / 218 24 95
customerservicese@tigerdrylac.com

TIGER Drylac U.S.A., Inc.
Arlington TX 76011
phone +1 / 817 / 277 79 95
fax +1 / 817 / 277 19 31
customerservicesouth@tigerdrylac.com

MIDDLE EAST

UNITED ARAB EMIRATES
TIGER Coatings Middle East (FZE)
Sharjah
phone +971 / (0)6 / 559 06 23
fax +971 / (0)6 / 559 06 24
office.ae@tiger-coatings.com

ASIA

CHINA
TIGER Drylac (Taicang) Co. Ltd.
Taicang, Jiangsu 215400
P.R. China
phone +86 / (0)512 / 53 56 06 19
fax +86 / (0)512 / 53 95 50 95
office.cn@tiger-coatings.com

TIGER Drylac Beijing Warehouse
Shibali dian Chaoyang, Beijing
P.R. China
phone +86 / (0)10 / 87 30 44 38
fax +86 / (0)10 / 67 70 35 04

TIGER Drylac Guangzhou Warehouse
Nancun town, Panyu Guangzhou
P.R. China
phone +86 / (0)20 / 84 59 29 01
fax +86 / (0)20 / 34 57 94 97

HONG KONG
TIGER Coatings Hong Kong Limited
Kowloon, Hong Kong
phone +852 / 27 81 55 82
fax +852 / 27 82 58 86
office.hk@tiger-coatings.com

INDIA
National Corporation
Bangalore-560 002, INDIA
phone +91 / (0)80 / 222 265 54
fax +91 / (0)80 / 222 148 00
rsachdev@vsnl.com

JAPAN
TIGER Drylac JAPAN K.K.
Kanagawa, 229-1135, JAPAN
phone +81 / (0)42 / 760 60 56
fax +81 / (0)42 / 760 60 57
office.jp@tiger-coatings.com

MALAYSIA
TIGER Drylac MALAYSIA Sdn. Bhd.
50250, Kuala Lumpur
phone +60 / (0)3 / 20 39 43 15
fax +60 / (0)3 / 20 31 83 59
office.my@tiger-coatings.com

SINGAPORE
TIGER Drylac SINGAPORE Pte. Ltd.
SINGAPORE 759196
phone +65 / 67 59 94 33
fax +65 / 67 59 94 36
office.sg@tiger-coatings.com

TAIWAN
Vigorousport Int. Co., Ltd.
Taichung, TAIWAN
phone +886 / (0)4 / 23 82 21 23
fax +886 / (0)4 / 23 82 21 11
office.tw@tiger-coatings.com

THAILAND
Grand Siam Commercial Co., Ltd.
Bangkok 10320
phone +66 / 2 / 691 62 74
fax +66 / 2 / 691 22 25
apichart@samart.co.th

VIETNAM
TIGER Drylac Vietnam Co., Ltd.
Binh Duong Province
phone +84 / 650 / 758 370
fax +84 / 650 / 758 371
office.vn@tiger-coatings.com

TIGER Drylac Ha Noi Warehouse
Ha Noi
phone +84 / 4 / 762 81 65
fax +84 / 4 / 762 81 64

POWDER COATED TOUGH™

Member of the Powder Coating Institute and the U.S. Green Building Council

TIGER Drylac® Series 38 – Exterior or Interior

A highly weather- and UV-resistant powder coating based on super-durable TGIC Polyester

Features

Superior Gloss and Color Retention
Excellent Weather Resistance
Good Mechanical Properties
Superior Chalking Resistance
Very Smooth Flow
Excellent Edge Coverage
Good Storage Stability

Typical Applications

Architectural Applications
Construction Industry
Lighting Fixtures
Park Furniture
Playground Equipment
Garage Doors
Stadium Seating
Fencing
Defense Industry
Automotive Equipment
Marine Applications
Agricultural Equipment
Sports Equipment
Recreational Vehicles
Lawn and Garden Equipment
Railing

Standard Series 38

Smooth Glossy (85±5*) RAL Colors (see RAL color and product number listing)
Smooth Matte (20±5*)
Smooth Matte Satin (30±5*)

Gloss level according to Gardner 60° ASTM D523

Custom Colors

Any other color or finish is available as a custom color with a 220-lb. minimum order. Due to pigmentation a small percentage of colors in the yellow, orange, red and purple range offer only limited UV stability. UV stability of custom color products in that color range must be verified by our production laboratories on a case by case basis.

Standard Packaging

44 lbs/20 kg and 55 lbs/25 kg carton or 5 lbs/2.5 kg Minipack

Specific Gravity

1.2 – 1.6 g/cm^3 depending on pigmentation

Theoretical Coverage

Depending on pigmentation and processing conditions.
1 lb coats approx. 50 sq. ft. at 3 mils avg.
1 kg coats approx. 10 sq. m. at 75 microns avg.

Processing

Electrostatic and Tribo/Airstatic Spraying, manual or automatic.

Dry Storage Stability

6 months at no more than 77° F/25° C

Cure Parameter

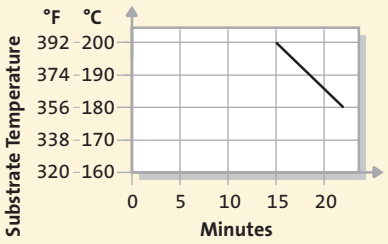

Note

A reasonable degree of loss of gloss and color variation due to long-term UV exposure can be expected.

notes

TIGER SHIELD System

for superior corrosion protection (recommended for marine environments and coastal regions)

Product Description
The TIGER Drylac SHIELD System is a two-coat process combining optimum corrosion protection with highest weatherability.

The basis for the excellent corrosion resistance is either TIGER Drylac 69/90350, a Dryzinc Primer or TIGER Drylac 69/70000, a Dryprotective Primer. This two coat system warrants an optimum non-porous film as well as excellent UV protection through the use of high quality polyester powder coatings.

Processing
Electrostatic and Tribo/Airstatic spraying, manual or automatic. TIGER Drylac 69/90350 Dryzinc Primer and TIGER Drylac 69/70000 Dryprotector Primer must be applied over a clean dry substrate, free of any contaminates and oxidation. Note: Time elapsed between application of TIGER Drylac 69/90350 Dryzinc Primer and topcoating with TIGER Drylac Series 38 Polyester must not exceed 12 hours max.

Steel/Iron

Topcoat: TIGER Drylac Series 38

TIGER Drylac 69/90350 Dryzinc Primer or TIGER Drylac 69/70000

Properly sandblasted **Iron/Steel** including **Structural Steel**

Aluminum

Under normal conditions a single coat of Series 38 powder coating is sufficient. In highly corrosive environments, as is found in coastal regions or industrial atmospheres, a 2-coat system of TIGER Drylac Dryprotector 69/70000 plus a topcoat of Series 38 can be beneficial. Both products are engineered to complement each other and offer an excellent corrosion barrier. For objects exposed to extreme conditions, especially where there is a possibility of filiform corrosion, Chromate Conversion coatings or Chrome Phosphatizing has been proven to be an excellent pretreatment choice.

Cure Parameters
TIGER Drylac Dryzinc Primer and Dryprotector Primer
In general, we recommend only partial rather than full cure for the first coat.

First Coat
69/90350 or 69/70000

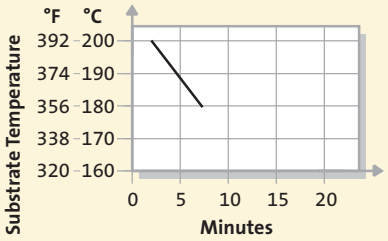

Second Coat
Series 38

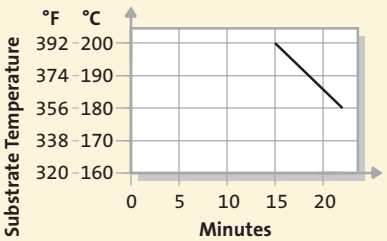

Specific Gravity
TIGER Drylac Series 38: 1.2–1.8 g/cm3 depending on pigmentation.
TIGER Drylac 69/90350 Dryzinc Primer: 3.0 ± 0/.1g/cm3
TIGER Drylac 69/70000 Dryprotector Primer: 1.6 ± 0/.1g/cm3

Theoretic Coverage
Depending on pigmentation and processing conditions and a specific gravity of 1.5. 1 lb coats approximately 51.5 square feet at 2.5 mils avg. 1 kg coats approximately 11.1 square meters at 60 microns avg.

Test Results on Aluminum:

Corrosion Resistance Humidity Resistance 3000 hrs.—ASTM D 2247	Formation of blisters not to exceed "few" blisters size #8 as shown in Figure 4.0 ASTM D 714	No blistering
Salt Spray Resistance 3000 hours – ASTM B 117	Minimum rating of 7 on scribe or cut edges, and a minimum blister rating of 8 within the test specimen field, in accordance with the Table 1 and Table 2 Reference modification of ASTM D 1654	No blistering, no undercutting

Test Results on Steel:

Salt Spray Resistance* ASTM 117-90	Undercutting	Blisters	Adhesion
1000 hour	0	m0 / g0	Gt0
2000 hour	0 – 1	m0 / g0	Gt0
3000 hour	2 – 3	m2 / g1	Gt0

*Tested on a 2-coat system of Series 38 and TIGER Drylac® 69/90350 Dryzinc Primer (substrate: steel—sandblasted)

Mechanical Properties:

Test	Results for basecoat alone 69/90350	Two-Coat System TIGER Drylac 69/90350 + TIGER Drylac Series 38
Film Thickness	2.4-2.6 mils/60±5µm	2.4-2.6 mils/60±5µm (Primer) 2.4-2.6 mils/60±5µm (Topcoat) Minimum requirement for a non-porous film!
Cross Hatch Adhesion ISO 2409 / ASTM D 3359	pass 100%	pass 100%
Mandrel Bending Test ISO 1519 / ASTM D 522	5/32 in. /4 mm (3/16 in./5 mm)	3/8 in./10 mm
Impact test 1/10 in. Distortion ISO 6272 / STM D 2794-90	up to 40 in./lbs. (up to 20 in/lbs.)	up to 40 in./lbs. (up to 20 in/lbs.)
Cupping ISO 1520	5/16 in./8 mm (3/16 in./5 mm)	5/16 in./8 mm (3/16 in./5 mm)

Data in "( )" reflects properties valid for TIGER Drylac 69/70000 Dryprotector.

super durable

TIGER Drylac™ Smooth Glossy RAL Colors available in Series 38:

RAL 1000 • 38/15000
RAL 1001 • 38/15001
RAL 1002 • 38/20002
RAL 1004 • 38/20004
RAL 1005 • 38/20005
RAL 1006 • 38/20006
RAL 1011 • 38/15011
RAL 1012 • 38/20012
RAL 1013 • 38/10013
RAL 1014 • 38/15014
RAL 1015 • 38/15015
RAL 1016 • 38/20016
RAL 1017 • 38/20017
RAL 1018 • 38/20018
RAL 1019 • 38/15019
RAL 1020 • 38/20020
RAL 1021 • 38/20021
RAL 1023 • 38/20023
RAL 1024 • 38/20024
RAL 1027 • 38/20027
RAL 1032 • 38/20032
RAL 2001 • 38/23170
RAL 2002 • 38/25002
RAL 2010 • 38/25001
RAL 3000 • 38/30000
RAL 3001 • 38/30001
RAL 3002 • 38/30002
RAL 3003 • 38/30003
RAL 3004 • 38/30004
RAL 3005 • 38/30005
RAL 3007 • 38/30007
RAL 3009 • 38/30009
RAL 3011 • 38/30011
RAL 3012 • 38/30012
RAL 3013 • 38/30013
RAL 3016 • 38/30016
RAL 3020 • 38/30021
RAL 3031 • 38/30031
RAL 4002 • 38/30008
RAL 4004 • 38/30024
RAL 4007 • 38/30025

RAL 5000 • 38/40000
RAL 5001 • 38/40001
RAL 5002 • 38/40002
RAL 5003 • 38/40003
RAL 5004 • 38/40004
RAL 5005 • 38/40010
RAL 5007 • 38/40007
RAL 5008 • 38/40008
RAL 5009 • 38/40009
RAL 5010 • 38/40016
RAL 5011 • 38/40011
RAL 5012 • 38/40012
RAL 5013 • 38/40013
RAL 5014 • 38/40014
RAL 5015 • 38/40015
RAL 5017 • 38/40017
RAL 5018 • 38/40020
RAL 5019 • 38/40019
RAL 5020 • 38/40018
RAL 5021 • 38/40021
RAL 5022 • 38/40022
RAL 5023 • 38/40023
RAL 5024 • 38/40024
RAL 6000 • 38/50000
RAL 6001 • 38/50005
RAL 6002 • 38/50023
RAL 6003 • 38/50003
RAL 6004 • 38/50004
RAL 6005 • 38/50002
RAL 6006 • 38/50006
RAL 6007 • 38/50007
RAL 6008 • 38/50008
RAL 6009 • 38/50009
RAL 6010 • 38/50031
RAL 6011 • 38/50011
RAL 6012 • 38/50012
RAL 6013 • 38/50013
RAL 6014 • 38/50014
RAL 6015 • 38/50015
RAL 6016 • 38/50016
RAL 6017 • 38/50017

RAL 6018 • 38/50018
RAL 6019 • 38/50019
RAL 6020 • 38/50020
RAL 6021 • 38/50021
RAL 6022 • 38/50022
RAL 6024 • 38/50024
RAL 6025 • 38/50025
RAL 6026 • 38/50026
RAL 6027 • 38/50027
RAL 6028 • 38/50028
RAL 6029 • 38/50029
RAL 6032 • 38/50032
RAL 6033 • 38/50033
RAL 6034 • 38/50034
RAL 7000 • 38/70000
RAL 7001 • 38/70003
RAL 7002 • 38/70007
RAL 7003 • 38/70017
RAL 7004 • 38/70004
RAL 7005 • 38/70005
RAL 7006 • 38/70006
RAL 7008 • 38/70008
RAL 7009 • 38/70009
RAL 7010 • 38/70014
RAL 7011 • 38/70011
RAL 7012 • 38/70012
RAL 7013 • 38/70013
RAL 7015 • 38/70015
RAL 7016 • 38/70016
RAL 7021 • 38/70021
RAL 7022 • 38/70022
RAL 7023 • 38/70023
RAL 7024 • 38/70024
RAL 7026 • 38/70026
RAL 7030 • 38/70027
RAL 7031 • 38/70031
RAL 7032 • 38/70001
RAL 7033 • 38/70033
RAL 7034 • 38/70034
RAL 7035 • 38/70035
RAL 7036 • 38/70036

RAL 7037 • 38/70037
RAL 7038 • 38/70038
RAL 7039 • 38/70039
RAL 7040 • 38/70046
RAL 7042 • 38/70042
RAL 7043 • 38/70043
RAL 7044 • 38/70044
RAL 7045 • 38/70045
RAL 7046 • 38/70002
RAL 7047 • 38/70047
RAL 8000 • 38/60000
RAL 8001 • 38/60005
RAL 8002 • 38/60002
RAL 8003 • 38/60003
RAL 8004 • 38/60004
RAL 8007 • 38/60007
RAL 8008 • 38/60008
RAL 8011 • 38/60011
RAL 8012 • 38/60012
RAL 8014 • 38/60010
RAL 8015 • 38/60015
RAL 8016 • 38/60016
RAL 8017 • 38/60017
RAL 8019 • 38/60019
RAL 8022 • 38/60022
RAL 8023 • 38/60023
RAL 8024 • 38/60024
RAL 8025 • 38/60025
RAL 8028 • 38/60028
RAL 9001 • 38/10001
RAL 9002 • 38/10002
RAL 9003 • 38/10003
RAL 9004 • 38/80004
RAL 9005 • 38/80010
RAL 9010 • 38/10004
RAL 9011 • 38/80001
RAL 9016 • 38/10010
RAL 9017 • 38/80017
RAL 9018 • 38/10018

Please refer to our RAL Exterior brochure for a display of RAL colors to go with above listed Series 38 product numbers.



TIGER Drylac® 38/10130
Seashell White 30±5*

TIGER Drylac® 38/10070
Bone White 30±5*

TIGER Drylac® 38/70048
Sky Grey 30±5*

TIGER Drylac® 38/15003
Almond 30±5*

TIGER Drylac® 38/15012
Sandstone 30±5*

TIGER Drylac® 38/70070
Taupe 30±5*

TIGER Drylac® 38/15002
Sierra Tan 30±5*

TIGER Drylac® 38/70025
Ash Grey 30±5*

TIGER Drylac® 38/70019
Slate Grey 30±5*

TIGER Drylac® 38/60014
Medium Bronze 30±5*

TIGER Drylac® 38/60018
Koko Brown 30±5*

TIGER Drylac® 38/30033
Boysenberry 20±5*

TIGER Drylac® 38/30041
Redwood 30±5*

TIGER Drylac® 38/30028
Brick Red 20±5*

TIGER Drylac® 38/50035
Seafoam Green Metallic

TIGER Drylac® 38/60006
Aged Copper 20±5*

TIGER Drylac® 38/50080
Ivy Green 30±5*

TIGER Drylac® 38/50037
Classic Green 30±5*

TIGER Drylac® 38/50110
Hartford Green 30±5*

TIGER Drylac® 38/60080
Statuary Bronze 30±5*

TIGER Drylac® 38/60060
Medium Bronze Metallic*

TIGER Drylac® 38/40025
Interstate Blue 20±5*

TIGER Drylac® 38/40051
Military Blue 30±5*

TIGER Drylac® 38/70049
Silver Grey 30±5*



TIGER Drylac® 38/80020
Jet Black 30±5*

*Gloss level according to Gardner 60° ASTM D523. Paper and ink limitations of color samples as well as influence from heat and light account for differences from actual powder coatings.

TIGER Drylac® 38/00001
Clear 90+*



TIGER Drylac® 38/10007
Bianco 302 85±5*

TIGER Drylac® 38/70032
Grey Classic 303 85±5*

TIGER Drylac® 38/70056
Grey Classic 310 85±5*

TIGER Drylac® 38/15009
Crème 305 85±5*



TIGER Drylac® 38/15007
Crème 303 85±5*

TIGER Drylac® 38/15005
Crème 301 85±5*

TIGER Drylac® 38/60021
Marrone 305 85±5*



TIGER Drylac® 38/60026
Marrone 306 85±5*

TIGER Drylac® 38/60039
Marrone 308 85±5*

TIGER Drylac® 38/50039
Highland 305 85±5*

TIGER Drylac® 38/50038
Highland 304 85±5*

TIGER Drylac® 38/50040
Highland 306 85±5*

TIGER Drylac® 38/50041
Highland 307 85±5*

TIGER Drylac® 38/60031
Marrone 302 85±5*

TIGER Drylac® 38/30035
Rosso 306 85±5*

TIGER Drylac® 38/30034
Rosso 305 85±5*

TIGER Drylac® 38/25006
Sunset 302 85±5*



TIGER Drylac® 38/20011
Deore 307 85±5*



TIGER Drylac® 38/20009
Deore 305 85±5*

TIGER Drylac® 38/40031
Azzurro 305 85±5*

TIGER Drylac® 38/40033
Azzurro 307 85±5*

TIGER Drylac® 38/70054
Grey Classic 308 85±5*

TIGER Drylac® 38/70061
Grey Classic 314 85±5*

TIGER Drylac® 38/80002
Carbon 301 85±5*

*Gloss level according to Gardner 60° ASTM D523. Paper and ink limitations of color samples as well as influence from heat and light account for differences from actual powder coatings.

TIGER Drylac® 38/90003
Argento 301 Metallic

TIGER Drylac® 38/90010
Marine Silver

TIGER Drylac® 38/90007
Argento 305 Metallic

TIGER Drylac® 38/90011
Argento 308 Metallic

TIGER Drylac® 38/90015
Pearl Dark Grey

TIGER Drylac® 38/90016
Argento 312 Metallic



TIGER Drylac® 38/90018
Argento 314 Metallic

TIGER Drylac® 38/60090
Dark Anodized Bronze 20±5*

TIGER Drylac® 38/30048
Pearl Ruby Red

TIGER Drylac® 38/30043
Rosso 302 Metallic

TIGER Drylac® 38/60064
Pearl Copper

TIGER Drylac® 38/30042
Rosso 301 Metallic

TIGER Drylac® 38/50131
Pearl Green

TIGER Drylac® 38/50135
Pearl Opal Green

TIGER Drylac® 38/50043
Highland 301 Metallic

TIGER Drylac® 38/40035
Azzurro 301 Metallic

TIGER Drylac® 38/40127
Pearl Night Blue

TIGER Drylac® 38/20014
Deore 302 Metallic

TIGER Drylac® 38/15018
Champagne 302 Metallic

TIGER Drylac® 38/15017
Champagne 301 Metallic

TIGER Drylac® 38/15021
Champagne 304 Metallic

TIGER Drylac® 38/20013
Deore 301 Metallic

TIGER Drylac® 38/15020
Champagne 303 Metallic



TIGER Drylac® 38/90009
Argento 307 Metallic

TIGER Drylac® 38/91020
Anodized Silver

*Gloss level according to Gardner 60° ASTM D523. Paper and ink limitations of color samples as well as influence from heat and light account for differences from actual powder coatings.